

PRODUCT DATA SHEET: Architectural Wood Doors

SPECIFICATIONS

Thickness: 1-3/4", bonded solid core construction.

Sizes: Widths up to 4'0". Heights up to 8'0".

Core: Wood based particleboard core which complies with ANSI A208.1, 1-LD2 or 1-LD1. Mineral core available upon request.

Veneers: Rotary Natural Birch or Rotary White Birch - Grade A.

Stiles: 1-1/4" min. (before trim) Structural Composite Lumber (SCL) with compatible veneer band, decorative laminate or compatible hardwood.

Rails: Top Rail: 5", Bottom Rail 2-1/4" (before trim). Structural composite lumber (SCL).

Undercut: 3/4" Standard.

Lites/Louvers: Available in various sizes.

Factory Finish: Unfinished and stained finishes available (Door Depot standard colors).

Adhesive: Door assembly - Type I, Veneers - Type II.

Blocking: Top rail, bottom rail, stiles and special blocking can be specified to meet specialized hardware requirements.

Mfg. Hinge/Lock: Standard is Steelcraft. All other manufacturer locations available.

Locations:

Warranty: Limited lifetime. No exterior warranty. Interior use only.


Machining: Pre-fitting, beveling, lock and hinge mortise and other hardware preps available.

Fire Rating: Non-fire rated Standard. Rating up to 90 minutes for mineral core upon request.

Door Weight: 5.5 lbs/sf.

Buy American Act: Meets Buy American Act - Made in USA.

Compliance:

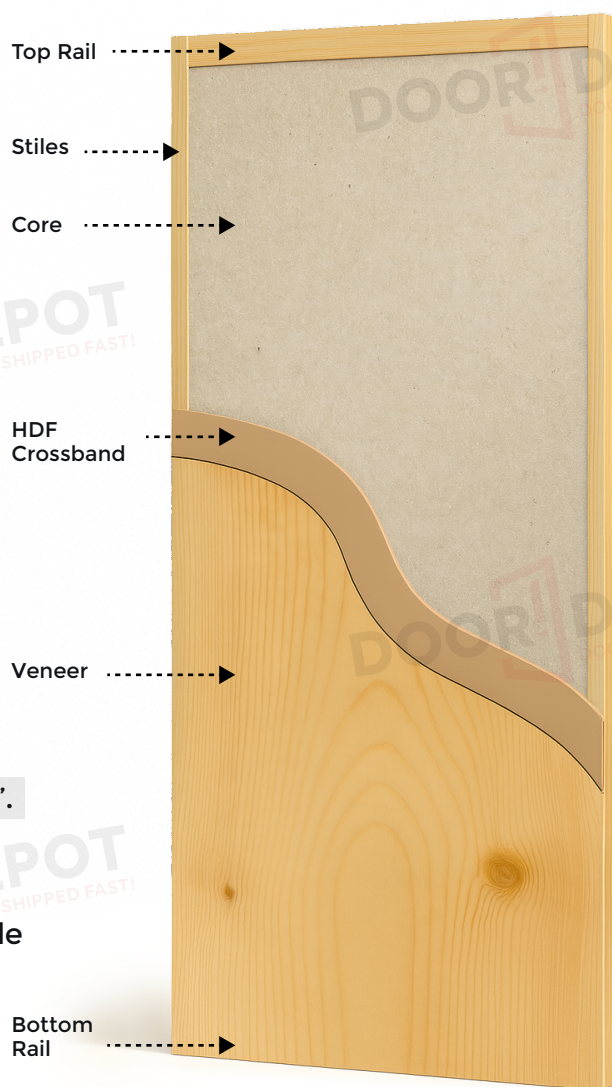

*Actual width is 1/4" under nominal door size, to allow for 1/8" clearance on hinge and strike sides.

*Actual height is 7/8" under nominal door size. Standard undercut is 3/4" + 1/8" clearance at top = 7/8"